


SCA Kraftliner Wet Strength

**Survives  
longer**



# Survives longer

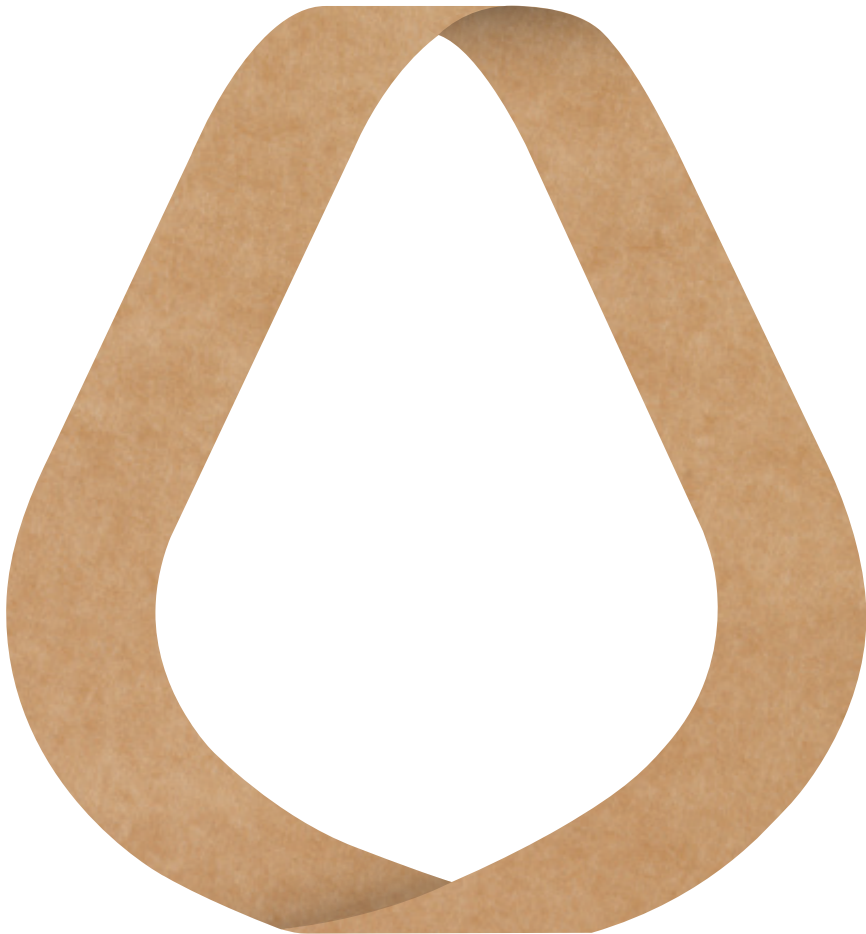

Our extreme performance product for maximum protection in high humidity and environments in the supply chain with fluctuating temperatures. Ideal for long-term storage, chemicals, fresh produce and other demanding applications.

SCA Kraftliner Wet Strength is produced with a base layer of mainly fresh fibre and a surface layer of the finest unbleached fresh fibre that provide excellent strength, long-life durability and maximum protection.

The unique properties of SCA Kraftliner Wet Strength enable us to offer outstanding performance even in the most extreme environments. This makes it an excellent choice when transporting hazardous goods or when you’re in need of some extra protection for your product.

### Control

Our strict control programme ensures that the moisture, strength, and glue absorption properties remain uniform and well defined. A high-tech process control enables our product to handle the most demanding corrugating and conversion processes. A rejection limit on peak-to-

peak CD variation classifies all moisture and dry streaks within the reel. This is essential for excellent runnability on modern high-speed corrugators and for the production of flat board. It also guarantees fewer defects and failures, and less waste.

### Performance

SCA Kraftliner Wet Strength provides a high-performance surface with uniform colour. At 90% relative humidity (RH), both tensile and bursting strengths are twice as high as for a standard grade liner. Combined with its excellent runnability and convertibility, SCA Kraftliner Wet Strength is made to meet the most demanding challenges and fulfils the legal demands for direct contact with dry, non-fatty food as well as foodstuffs that are shelled, peeled or washed before consumption.

#### TYPICAL VALUES\* (as of October 2023)

Property	Unit	Method			
Grammage	g/m²	ISO 536	250	420	440
Thickness	µm	ISO 534	325	530	560
Bursting strength	kPa	ISO 2758	995	1645	1700
Bursting strength wet	kPa	ISO 3689	330	530	600
SCT CD	kN/m	ISO 9895	5.1	8.0	8.6
SCT MD	kN/m	ISO 9895	7.5	12.1	12.7
Tensile stiffness CD	kN/m	ISO 1924-3	860	1340	1380
Tensile stiffness MD	kN/m	ISO 1924-3	1950	2900	3010
Roughness, Bendtsen	ml/min	ISO 8791-2	1000	1450	1450
Cobb 60	g/m²	ISO 535	25	25	25

\*Typical value is our long-term average, typically the last annual average based on all measures on customer reels.

**Bursting strength:** High bursting strength is important for the containability of the corrugated box and the box performance in varying climate conditions, such as cold storage or freezer applications. It is also evidence of high fresh fibre content, which improves convertibility by reducing cracking and dusting when die cutting.

**SCT:** The compression strength is vital for the edge crush strength (ECT) of the board, which in turn is significant for the box compression strength (BCT).

**Tensile stiffness:** Tensile stiffness of the liner in combination with the thickness of the corrugated board determines the bending stiffness of the corrugated board, which is key to resisting bulging of boxes and trays.

**Moisture:** Even moisture profile is essential for excellent runnability on modern high-speed corrugators and for the production of flat board.

**Testing conditions**  
All our values are based on testing at standard climate, 50% RH and 23°C. We participate in the Greenhouse Comparative Testing.

Reel core diameter: 10 cm.

Latest updated version can be found on [www.sca.com/containerboard](http://www.sca.com/containerboard)



SCA Containerboard mills are certified in accordance with ISO 9001, ISO 14001, ISO 45001 and ISO 50001.



## The right product for the right job



SCA Kraftliner  
White Top



SCA Kraftliner  
Heavy Duty



SCA Kraftliner  
Wet Strength



SCA Kraftliner



SCA Eurokraft

All Kraftliner products are based on our original, high quality **SCA Kraftliner**, with a base of mainly fresh fibre and a smooth surface layer of the finest unbleached fresh fibre.

The superior properties of SCA Kraftliner make it suitable for demanding applications, and by adding reliable technical properties we achieve outstanding performance for a range of specific purposes — consumer durables, electronics, hazardous goods, industrial products, and frozen foods, etc.

Our Kraftliner product extensions — **White Top** with brilliant printing properties, **Wet Strength** for maximum capacity in high humidity and long-term storage, and higher grammage **Heavy Duty** for extreme execution in demanding applications — are the result of our own R&D.

**SCA Eurokraft** is our complement to the Kraftliner products. A capable alternative for less demanding applications. It has a base of recycled fibres and a top layer made with purely fresh fibre that offers higher performance than recycled liners.

